

Data Sheet

SMG-5410 | RS232 Modbus Gateway



Overview


SMG-5410 is an industrial Modbus Gateway that converts and routes Modbus data between the serial line and Modbus/TCP. This can help communicate between Modbus master (or slave) of serial line and Modbus slave (or master) of network.

SMG-5410 provides 10/100Mbps Ethernet and RS232 serial port.

Features

- RS232 Modbus Gateway
- 10Base-T/100Base-TX Ethernet
- RS232 serial port
- Support multiple TCP connection (Max. 4 channels)
- Free Modbus/TCP program
- Industrial temperature range (-40°C ~ +85°C)

System Diagram

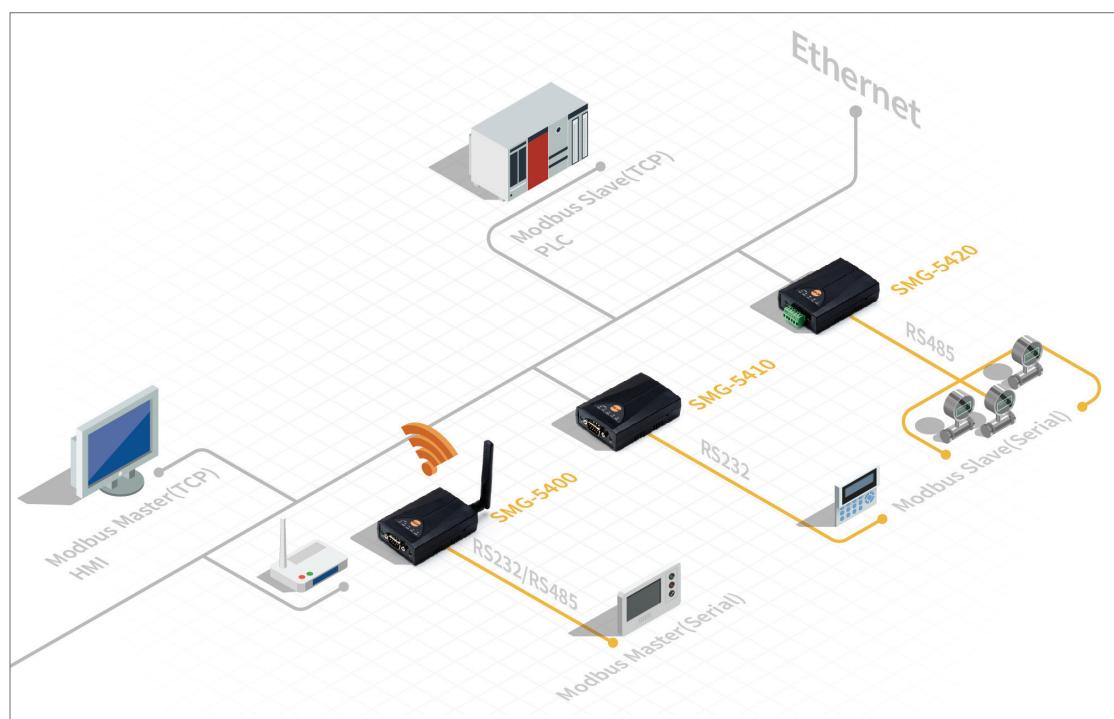

Specifications

Serial Physical Interface	
Serial Interface	RS232 - RXD, TXD, GND, RTS, CTS
Connector	9 pin D-sub male
Serial Port Properties	
Baudrate	1,200bps ~ 230,400bps
Data Bits	8 bits, 7 bits with Parity
Parity	None, Even, Odd, Mark, Space
Stop Bit	1, 2
Network Physical Interface	
Network Interface	10Base-T/100Base-TX Ethernet (RJ45) Ethernet Speed Auto Sense 1:1 or Cross-over Cable Auto Sense
Software Functions	
Protocols	IPv4/IPv6 Dual Stack
	TCP/UDP
	ICMP, DHCP, mDNS, Modbus/TCP
	Modbus/RTU, Modbus/ASCII
	SSL/TLS
Indicators (LEDs)	
LED	PWR, LINK, RUN, MTX, MRX, STX, SRX
Management	
spFinder	Configuration and Monitoring Tool
Security	Password
Dimension	
Size	89mm x 57mm x 23mm
Weight	About 69g
Operating Environments	
Input Voltage	DC 5±0.5V
Protection	Reverse Voltage Protection / Surge Protection
Current Consumption	Typically, 145mA
Operating Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Certificate	
KC	Registration (KN 32, KN 35)
CE	EMC 2014/30/EU, RoHS 2011/65/EU
FCC	FCC Part 15 Subpart B, Class A