

데이터시트

# CSE-H53N | Industrial RS232 Ethernet Device Server




## Overview

CSE-H53N은 IPv6 기반의 시리얼↔이더넷 변환기입니다. CSE-H53N은 -40°C~+85°C의 산업용 온도 사양을 지원합니다. 또한 DNS/DDNS, Telnet COM Port Control Option 등의 기능을 내장하여 다양한 통신환경에서 적용이 가능합니다.


## Features

- IPv4 / IPv6 이중 스택
- Stateless / Stateful (DHCPv6) 주소 자동설정
- IPv6 fragmentation
- ICMPv6, TCPv6, UDPv6
- Ethernet 10Base-T or 100Base-TX (Auto-Sensing)
- RS232 (D-sub 9pin Male, 최대 230.4Kbps)
- 산업용 온도 사양 (-40°C~+85°C)
- 다중 접속 기능(F/W v2.3A 이상)
- 강력한 통신 상태 점검 기능 (ezManager, TELNET)
- 패킷 분할 구분문자 설정 기능

## Application

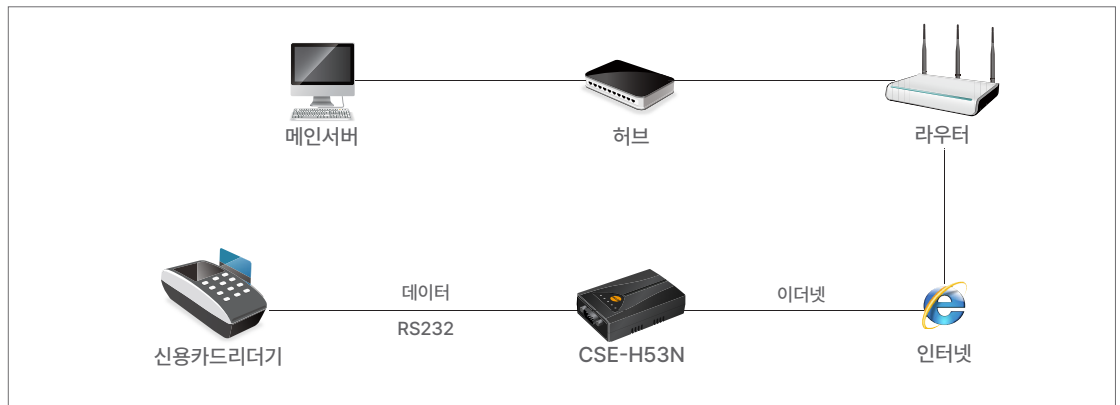

## System Diagram

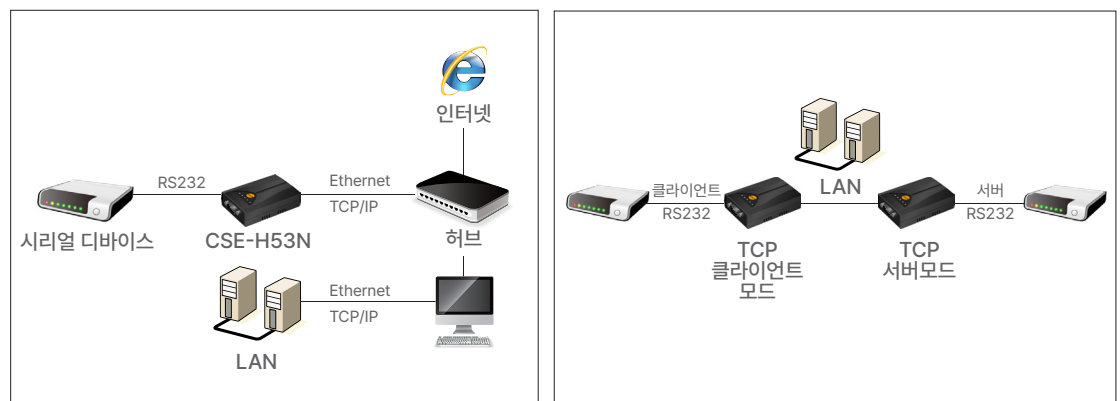

## Specifications

Serial Physical Interface			
Serial interface	RS232		
	RXD, TXD, GND, RTS, CTS		
Connector	9 pin D-sub male		
Serial Port Property			
Baudrate	300 bps ~ 230,400 bps		
Data Bits	8bits, 7bits with parity		
Parity	None, Even, Odd, Mark, Space		
Stop Bit	1, 1.5, 2		
Network Physical Interface			
Network Interface	10Base-T/100Base-TX Ethernet (RJ45)		
	Ethernet Speed Auto Sense		
	1:1 or Cross-over Cable Auto Sense		
Software Functions			
Protocols	IPv4/IPv6 dual stack, ICMPv6/TCPv6/UDPv6, TELNET		
	TCP, UDP, IP, ICMP, ARP / DHCP, PPPoE, DNS, DDNS		
	Telnet COM Port Control Option (RFC 2217)		
Security	SSL (Secure Socket Layer)		
	IP & MAC filtering - Restrict host or network		
	Password for Configuring		
Communication Mode	TCP Server (T2S)		
	TCP Client (COD)		
	TCP Server/Client with AT command (ATC) - Patent		
	UDP Mode (U2S)		
Additional Functions	Separator settings for packet fragmentation		
	TCP Server/Client Mode		
	Sending MAC address Option		
Indicators (LEDs)			
Power	Red	Ethernet TXD	Green
Status	Yellow	Serial RXD	Yellow
Ethernet Link	Green	Serial TXD	Green
Ethernet RXD	Yellow		
Management			
ezManager	Configuration and Monitoring Tool through Ethernet		
Telnet	Telnet Login		
AT Command	Configuring in ATC Mode - Patent		
Supplementary Software			
ezManager	Configuration Tool for Windows		
ezVSP	Serial to Network Virtual Driver for Windows		
ezTerm	Simple TCP/IP Communication Test Tool		
Dimension			
Size	89.0mm x 57.0mm x 24.0mm		
Operating Environments			
Input Voltage	DC 5V ±0.5V		
Protection	Over Current Protection / Reverse Voltage Protection / Surge Protection		
Current Consumption	200mA typical		
Operating Temperature	-40°C ~ +85°C		
Storage Temperature	-40°C ~ +85°C		